

11.07-00

A

## THOMASON, MOSER &amp; PATTERSON, LLP

*Attorneys at Law*595 SHREWSBURY AVENUE  
SUITE 100  
SHREWSBURY, NEW JERSEY 07702Telephone (732) 530-9404  
Facsimile (732) 530-9808  
www.tmplaw.comJC920 U.S. PTO  
09/10/04

00/96/11

## PATENT APPLICATION

Assistant Commissioner for Patents  
Box **Patent Application**  
Washington, D. C. 20231

Sir:

Enclosed herewith for filing is the following **utility patent application**:Applicant(s): **Patrick D. Lincoln**  
**David W.J. Stringer-Calvert**  
**Steven M. Dawson**Title of application: **METHOD AND APPARATUS FOR GENERATING,  
DISTRIBUTING AND RECONSTRUCTING DECONSTRUCTED VIDEO**Pages of specification: 24 (+ 7 pages of claims and 1 page  
abstract)Sheets of drawing: **7**Executed on: November 3, 2000 Attorney Docket No. **SRI/002**

## PATENT APPLICATION FILING FEE CALCULATION

	<u>No. Filed</u>	<u>Less</u>	<u>Rate/Claim</u>	<u>Fee</u>
Total Claims	45	-20	25 x \$18.00	<u>\$450.00</u>
Independent Claims	5	-3	2 x \$80.00	<u>\$160.00</u>

Minimum Filing Fee \$710.00

Multiple Dependency Fee  
(if applicable - \$270.00) \$50% Reduction for Small Entity  
(Independent Inventor, Non-profit  
Corporation, or Small Business  
Concern) - appropriate  
verified statement attached - \$660.00TOTAL FILING FEE **\$660.00**

11/06/00 JC957 U.S. PTO

09/10/04 11:07-00


Kindly charge the entire and/or any additional filing fee, as appropriate, to deposit account number 20-0782. To facilitate that charge, a duplicate copy of this letter is enclosed herewith.

Also enclosed herewith for filing in connection with the enclosed application are:

       Oath;  
XX Declaration and Power of Attorney;  
       Disclosure Statement;  
       Letter referencing previously filed disclosure document; number                      filed                     ;  
XX Verified Statement claiming small entity status;  
XX An assignment of the application to SRI International:  
       Claim(s) to priority  
            Serial Number            Filing date  
       A certified copy of a              patent application or inventor's certificate, filed                      and serial no.                     , upon which a claim to priority is made;

Respectfully submitted,

11-6-00

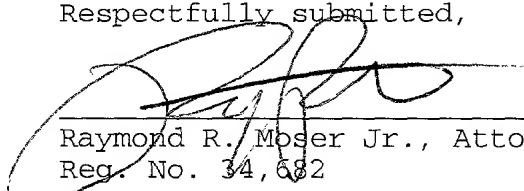  
Raymond R. Moser Jr., Attorney  
Reg. No. 34,682

Thomason, Moser & Patterson LLP  
Attorneys At Law  
595 Shrewsbury Avenue  
First Floor  
Shrewsbury, NJ 07702

**\*\*\*EXPRESS MAIL CERTIFICATION\*\*\***

"Express Mail" mailing label number: EL709050175US

Date of deposit: November 6, 2000

I hereby certify that this patent application and related papers is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Box Patent Application, Washington, D.C. 20231.

Michael Civil  
Signature of person mailing paper or fee

michael civil  
Name of person mailing paper or fee

**STATEMENT CLAIMING SMALL ENTITY STATUS**  
**(37 CFR 1.9(f) & 1.27(d))--NONPROFIT ORGANIZATION**

Applicant: SRI INTERNATIONAL  
Application No.: submitted herewith  
Filed: NOVEMBER 3, 2000  
Title: METHOD AND APPARATUS FOR GENERATING, DISTRIBUTING AND RECONSTRUCTING DECONSTRUCTED VIDEO

I hereby state that I am an official empowered to act on behalf of the nonprofit organization identified below:

NAME OF NONPROFIT ORGANIZATION: SRI INTERNATIONAL  
ADDRESS OF NONPROFIT ORGANIZATION: 333 Ravenswood Avenue  
Menlo Park, CA 94025

TYPE OF NONPROFIT ORGANIZATION: UNIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION  
TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 U.S.C. 501(a) and 501(c)(3))

NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA

NAME OF STATE CALIFORNIA  
CITATION OF STATUTE California Corporations Code Section 5110 et seq.

WOULD QUALIFY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 U.S.C. 501(a) and 501(c)(3)) IF LOCATED IN THE UNITED STATES OF AMERICA

WOULD QUALIFY AS NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA IF LOCATED IN THE UNITED STATES OF AMERICA

(NAME OF STATE \_\_\_\_\_)  
(CITATION OF STATUTE \_\_\_\_\_)

I hereby state that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying reduced fees to the United States Patent and Trademark Office regarding the invention described


[ ] in:  
[XX] the specification filed herewith with title as listed above.  
[ ] the application identified above.  
[ ] the patent identified above.

I hereby state that rights under contract or law have been conveyed to and remain with the nonprofit organization regarding the above identified invention. If the rights held by the nonprofit organization are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities and that no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

[ ] Each person, concern, or organization having any rights in the invention is listed below:  
[XX] no such person, concern, or organization exists.  
[ ] each such person, concern, or organization is listed below.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING: Edward E. Davis  
TITLE IN ORGANIZATION OF PERSON SIGNING: Assistant Secretary  
ADDRESS OF PERSON SIGNING: SRI International, 333 Ravenswood Ave., Menlo Park, CA 94025

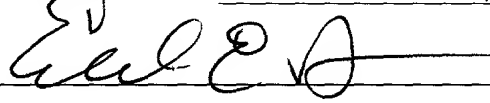SIGNATURE  DATE 11/3/00

# METHOD AND APPARATUS FOR GENERATING, DISTRIBUTING AND RECONSTRUCTING DECONSTRUCTED VIDEO

## BACKGROUND OF THE INVENTION

5

### 1. Field of the Invention

The invention generally relates to video distribution systems and, more particularly, to video distribution systems that distribute deconstructed video through communications networks.

10

### 2. Description of the Background Art

Video transmission through communications networks such as the INTERNET has become ubiquitous. Typically, the video is encoded using a compression algorithm such as MPEG-2 or Quicktime and transmitted as a single compressed bitstream to the user. The user's equipment comprises a plurality of compressed-video decoders that can decode various forms of encoded video. However, if the user's equipment is of a type that has limited computing power, the decoded image sequence may be distorted, or otherwise have poor quality.

15

20

One method that is used to match the quality of the encoded imagery to the capabilities of the user equipment is to encode a plurality of bitstreams where each stream represents a different level of image quality. The user then selects a bitstream from the plurality of encoded bitstreams. The quality of the video encoded into the selected bitstream matches the processing power of the user's equipment, i.e., a small hand-held computing device capable of low resolution video presentation would select a low resolution bitstream. As such, the user receives and decodes the selected bitstream in a manner that matches the capabilities of their device.

25

30

Such systems require the user to apriori understand the capabilities of their decoder and select an appropriate bitstream. Many times such selection is not possible or it is accomplished by trial and error, i.e., the user repeatedly selects bitstreams until an appropriate one is

35

found. Furthermore, transmitting a plurality of encoded  
bitstreams where each bitstream comprises a full  
representation of an image sequence consumes an enormous  
amount of bandwidth within the communications network and a  
5 large amount of storage space on a server.

Therefore, there is a need in the art for a method and  
apparatus that deconstructs the video in a hierarchical  
manner, transmits each level of deconstructed video in the  
hierarchy, and enables user equipment or a network interface  
10 device to reconstruct a video stream from select levels of  
the deconstructed video that is commensurate with the  
capabilities of the user equipment.

#### SUMMARY OF THE INVENTION

15 The present invention provides a method and apparatus  
for deconstructing a video signal (a sequence of video  
frames) into a hierarchical structure, distributing the  
deconstructed video, and reconstructing the video signal  
20 such that the video signal quality of the reconstructed  
video signal matches the capabilities of the user device  
that is to decode and display the video. To begin the  
deconstruction process, the video image sequence may be  
divided into one or more constituent components, i.e.,  
25 foreground objects are separated from the background, moving  
objects are separated from the background, faces of people  
are separated from remaining video, text or graphics are  
separated from the remaining video, and so on. Of course,  
the invention does not require the video sequence to be  
30 divided into its components parts such that the intact video  
image sequence can be encoded. The components or the entire  
video image sequence may be deconstructed using a single  
dimension deconstruction process or a multidimensional  
deconstruction process. The single dimension deconstruction  
35 process creates a hierarchy along a single characteristic of  
each component. For example, each component of the video  
may be deconstructed along a resolution characteristic by  
producing a first bitstream that is encoded using a low

resolution encoder, a second bitstream is created using a slightly higher resolution encoder, and so on. Such deconstruction along a single dimension (e.g., image resolution) is one example of the many dimensions that could be used. Other examples include color depth, frame rate, display type, and the like.

In one embodiment of the invention, multidimensional deconstruction is accomplished by generating a partial order representation of the deconstructed elements for each component of the video signal. Each point in the partial order represents a particular valid combination of encoding parameters. For example, the video image sequence can be processed to extract background from foreground information within the video signal, the background information can be encoded using a plurality of frame rates, while the foreground material can be coded using another plurality of frame rates. Upon reconstruction, the user device may be provided a low frame rate for the background and a high frame rate for the foreground. Additionally, the foreground material can be encoded using a higher resolution than the background material. In fact, many levels of resolution and frame rates can be used and then selectively combined for the user device. As such, the image sequence is deconstructed into components which are each then deconstructed into multiple dimensions.

Each combination of encoding parameters represented by a required set of points in the partial order is encoded into a bitstream for transmission through a network. The separately encoded bitstreams are transmitted from one network interface device (NID) to another through the network. The network may be the INTERNET, cable television network, satellite network, wireless network or a combination of networks. The bitstreams may be pointcast, multicast or broadcast through the network. The protocol used for transmission is any one that is supported by the network. The NID that receives the bitstreams, reconstructs the video signals into a format that can be decoded by the user equipment or, if the NID is an intermediate node in the

network, reconstructs the video signals into a format that can be decoded by other "downstream" NIDS. The NID at the edge of a network then transmits the reconstructed stream to the user equipment. The protocol used to propagate the video to the user equipment may be MPEG-2 or some other compression protocol that is suitable for reception by the user equipment.

The edge NID forms a universal translator that resides at the edge of a network and receives the bitstreams from the network in their deconstructed state and reconstructs the video signal using one or more of the bitstreams. The bitstreams are selected based upon the capabilities of the user equipment to decode the video signal. For example, if the user equipment is capable of receiving low resolution MPEG-2 signals having 24-bit color depth and a 10 fps frame rate, the NID selects bitstreams that have the elements of a low resolution bitstream, a 24-bit color depth and a 10 fps frame rate. The selected elements are combined to form an MPEG-2 compliant bitstream having the required color depth and frame rate. The compliant bitstream is coupled to the user equipment for decoding and presentation.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts a block diagram of a system for generating, distributing and reconstructing deconstructed video;

FIG. 2 depicts a block diagram of a network interface device (NID) that creates deconstructed video for transmission;

FIG. 3 depicts a flow diagram, representing the operation of the NID of FIG. 2;

FIG. 4 depicts an illustration of a video element lattice used for generation and reconstruction of a deconstructed video bitstream;

FIG. 5 depicts a block diagram of a NID that reconstructs the video sequence for a user device;

FIG. 6 depicts a flow diagram representing the operation of the NID of FIG. 4; and

5 FIG. 7 depicts a block diagram of an alternative embodiment of the invention.

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

10

#### DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 depicts a block diagram of a system 100 that generates, distributes and reconstructs deconstructed video.

15 The system 100 comprises at least one network interface device (NID) 104 for generating deconstructed video, at least one NID 108 for reconstructing the video once received, and a network 106 for propagating the deconstructed video from NID 104 to NID 108. Also depicted  
20 are a source 102 of video for NID 104 and a user device 110 coupled to NID 108. These NID's generally reside at the "edge" of the network (i.e., edge NIDs) to couple content to the network or provide content to a user device or to  
25 provides a sequence of image frames forming a video signal. The video signal may or may not be compressed or encoded. If encoded, the NID 104 decodes the encoded video signal and then performs a video deconstruction process. The deconstruction process, as described in detail below, may be  
30 based on any parameter, characteristic or property of the video, any characteristic or parameter of the network, or any characteristic or parameter of the user devices as well as any combination of characteristics, parameters, and properties of the system components.

35 The user device 110 comprises a video decoder that receives a video signal, typically an encoded video signal, from the NID 108. The NID 108 receives the deconstructed video bitstreams from the network 106 and produces a video



signal that is suitable for the user device 110. The NID 108 forms, in essence, a universal video translator that translates the plurality of deconstructed video bitstreams into a signal that is suitable for processing and display by the user device 110.

In one embodiment of the invention as used in an Internet environment, the video source 102 may be a content server, the NID 104 may be a host server for a website that contains video, and the NID 108 may be a cache server in the user's "neighborhood". Such caching is well-known in the art as a way of reducing content delivery latency for highly trafficked websites. As such, the website and its video, represented in a deconstructed form, are stored in the NID 108. The deconstructed video would be selectively reconstructed depending upon the capabilities of the user device that requests the website pages.

Alternatively, in another embodiment of the invention, NID 108 can be a gateway to another network (i.e., a translation node). For example, the NID 108 may select and translate deconstructed video bitstreams into video signals having characteristics that can be transmitted through a wireless network. Or, the network may contain intermediate NIDS that reconstruct and deconstruct the bitstreams as needed to efficiently propagate the video to end users through various networks or portions of networks. A detailed description of a network having intermediate nodes, translation nodes and edge nodes is described below with reference to FIG. 7.

FIG. 2 depicts a block diagram of the NID 104 and FIG. 3 depicts a flow diagram representing the operation of the NID 104. To best understand the operation of the NID 104, the reader should simultaneously refer to both FIGs. 2 and 3.

The NID 104 comprises an optional decoder 200, a processor 202, a memory 204, processor support circuits 206, and a network interface circuit 208. The decoder 200 is only used when the video source provides encoded video such as MPEG-2 compliant video or some other compressed video sequence. The decoder 200 converts the encoded video into a

sequence of video frames (also referred to as a video image sequence) where each frame comprises an array of pixels. The video image sequence is coupled to the processor 202 for image processing and video deconstruction.

5       The processor 202 is a general purpose processing unit, that, when executing programs that are stored in memory 204, becomes a specific purpose processor that deconstructs the video signal to form one or more deconstructed video bitstreams. Although only one processor is shown, those  
10 skilled in the art will realize that a plurality of processors may be used in parallel to perform the functions necessary to produce deconstructed video. The support circuits 206 comprise well-known circuits such as power supplies, cache, clocks, and the like that facilitate the  
15 functionality of the processor 202. The memory 204 may comprise random access memory, read only memory, flash memory, removable storage, hard disk drives, or any combination thereof. The memory 204 stores a video deconstruction routine 210 that when executed by the  
20 processor 202 causes the processor 202 to become a video deconstruction processor. The network interface circuit 208 uses a network transmission protocol, e.g., asynchronous transfer mode (ATM), to organize and transmit the deconstructed video bitstreams through the network.

25       Although the network interface device 104 is depicted as a general purpose computer that, when executing the software of the invention, performs the method of the invention, those skilled in the art will understand that the device 104 can be implemented using, for example, an  
30 application specific integrated circuit (ASIC).

FIG. 3 depicts a flow diagram of the video deconstruction process performed by the processor 202. The video deconstruction process performs three major subprocesses. First, the video image sequence is analyzed  
35 and divided into components with respect to characteristics in the video. Second, a base bitstream is formed that contains video information so that any user device connected to the network can receive the base bitstream. Lastly, each

component is encoded using one or more encoding dimensions to form various augmenting bitstreams that are used to enhance the base bitstream. As such, various combinations of the base bitstream with selected ones of the augmenting  
5 bitstreams will create various video sequences having different properties.

The deconstruction process begins at step 301 and proceeds to step 302. At step 302, an operator (or an automated routine) selects the appropriate video components  
10 that are to be extracted from the video image sequence. The components that can be extracted include, but are not limited to, character recognition to differentially encode text versus moving video; face recognition to differentially encode faces versus the remaining video; motion detection to  
15 differentially encode moving objects versus stationary objects; object model encoding; encoding fixed regions differently than other regions; encoding infrared geometric shapes differently than other regions of an image; encode explicitly annotated regions differently than other regions;  
20 and chart or shape recognition to encode certain regions containing graphics different from other regions. The deconstruction method is most efficient when the extracted components are orthogonal. If the components are less than orthogonal, i.e., information from one component is  
25 contained in another component, then the deconstructed video requires more bandwidth than is used by deconstructed orthogonal components. Once selected, step 303 performs conventional component extraction to form separate video sequences containing the extracted components. Of course,  
30 the operator may select that no components be extracted.

At step 304, the routine queries whether the NID is to apply a single dimension deconstruction or a multiple dimension deconstruction to each of the components of the video image sequence. If a single dimension deconstruction  
35 is to be performed, the routine proceeds to step 306.

At step 306, the user selects a dimension to use for deconstruction. Alternatively, the NID may automatically select the dimension. These dimensions may comprise image

resolution, image frame rate, encoding bit budget, color depth and the like.

The selected dimension is divided into a hierarchical structure of levels where each level represents a change in the characteristics of the selected dimension. For example, if the video image sequence was divided into two components and if the selected dimension is the resolution of the image, each level of deconstruction represents a change (e.g., an improvement) in the resolution of the image stream. Each component is represented by multiple resolution levels and a bitstream is generated for each level. As such, the video image sequences that comprise each component are subsampled to form frames of lesser resolution. This subsampling process is known as forming an image pyramid. Once a pyramid is formed for one or more of the frames of video, the various levels of the pyramid are processed to form a bitstream containing the information in each level across a plurality of video frames. For example, five levels of an image pyramid may be created for each image frame, and the first level information from each pyramid is processed to form a first bitstream (base bitstream), the second level information is formed into a second bitstream (a first augmentation bitstream), and so on until the fifth level (the highest resolution) is formed into a fifth bitstream (fourth augmentation bitstream). The dimension-based encoding is performed on a video image sequence having a plurality of extracted components, where a base bitstream is encoded using the remainder of the original video sequence after the components are extracted and then each extracted component is encoded using the dimension-based encoding. Alternatively, all the extracted components can each be dimension-based encoded without forming a single base bitstream. The bitstreams are then coupled to the network interface circuit 208 for transmission through the network to a user. Once all the video streams are processed, the routine ends at step 310.

If multidimensional deconstruction is to be performed, the routine proceeds from the query at step 304 to step 312.

At step 312, the routine 210 selects a plurality of dimensions that are to be used in the deconstruction process to dimension-base encode the components of the video image sequence. These dimensions may include frame rate,

5 resolution, black and white versus color, display type (VGA, XGA, etc.), and the like. This list of dimensions is not considered to be exhaustive. Those skilled in the art could derive many other dimensions for encoding that are intended to fall within the scope of this invention. Any combination  
10 of these encoding dimensions could be performed by the routine to encode the video signal.

At step 314, the multidimensional encoding process processes the video stream for the selected dimensions using a hierarchical processing. This is similar to the process  
15 described earlier as embodied in step 308, but repeated for each dimension.

Once the bitstreams have been calculated for each dimension, the routine calculates, at step 316, a common base bitstream from the plurality of bitstreams calculated  
20 in step 314. This process involves calculating the common components between each of the dimensional base bitstreams, resulting in the common base bitstream being a further lower point in a partial order representation of the augmentation streams for all of the chosen dimensions. The base  
25 bitstreams of each individual dimension are now considered to be augmentation bitstreams over the common base bitstream.

This common base bitstream will constitute the base of a lattice (i.e., a specific partial order). Figure 4  
30 depicts an illustrative lattice 400 for a two dimensional encoder. In the illustration, the lattice shows a first dimension (axis 402) being the foreground quality and the second dimension (axis 404) being the background quality. The node 410 represents the common base bitstream, and nodes  
35 along axes 402 and 404 representing the augmentation bitstreams for each of the dimensions. The intersection points on the lattice (shown as an "x" 408A, 408B, 408C and so on) represent possible combinations of the base bitstream

with a plurality of augmentation bitstreams to form an "improved" video image.

Note that in a more general embodiment of the current invention, there may not be a common base bitstream other than the trivial or empty bitstream. In these cases, the multi-dimensional deconstruction can be considered a partial order, and we do not transmit the (empty) common base bitstream. Also, there may not be a unique least improvement bitstream above any two given points, and again the multi-dimensional deconstruction can be considered a partial order (as opposed to lattice), and a choice is made among the points dominating a given pair of points, and the corresponding base and improvement bitstreams are selected. Each of the bitstreams (including all base bitstreams, common base bitstream and augmentation streams) are then coupled to the network interface circuit 208 for transmission onto the network 106. At step 318, the network interface circuit 208 performs the required packetization of the bitstreams and the inclusion of a packet header and other routing information to properly route the packet through the network 106. The packetization process may comply to one of many available protocols, e.g. ATM, MPEG-2, and the like. The routine 210 ends at step 320.

Although the method is described as creating a plurality of deconstructed bitstreams that together represent a video sequence, the invention may combine the various bitstreams into a one or more bitstreams in a manner similar to the use of transport streams in an MPEG-compliant transport stream.

FIG. 5 depicts a block diagram of NID 108 and FIG. 6 depicts a flow diagram representing the operation of NID 108. NID 108 comprises a network interface circuit 502, a processor 504, a memory 506, support circuits 508 and user device interface circuits 510. The network interface circuit 502 is coupled to the network 106 to receive the bitstream(s) therefrom. The bitstreams are coupled to the processor 504 for reconstruction into a video signal. The

network interface circuit receives a plurality of the bitstreams representing a particular program that have been deconstructed by the NID 104. Depending on the user device, the processor 504 selects the appropriate video bitstreams to be used for reconstruction of a video stream that is commensurate with the quality depiction capable of user device, i.e., the processor 504 selects a base bitstream plus one or more augmentation bitstreams for a particular node of the lattice.

The processor 504 is a general purpose computer that, when executing particular software, becomes a specific purpose computer. For example, the processor 504 executes video reconstruction routine 512 that is stored in memory 510 to cause the processor 504 to become a video reconstruction processor that reconstructs the video signal from selected bitstreams. Alternatively, the processor 504 may be a specific purpose computer, i.e., an application specific integrated circuit (ASIC), designed to perform video reconstruction. Further processing of the reconstructed video stream may be accomplished by the processor 504 executing the video processing routine 514. Such additional processing is used to create a video bitstream that is compliant with the user device requirements, e.g., creating an MPEG-2 compliant bitstream, a Quicktime bitstream, and the like. The reconstructed video bitstream is coupled from the processor 504 to the user device interface circuit 510. This interface circuit 510 operates in conjunction with the processor 504 to convert the video bitstream into a signal that can be used by the user device. Such a stream may be baseband video, S-video, MPEG-2 video, Quicktime video, NTSC television signals, and the like. For example, if the user device were a standard television, the processor 504 generates a digital video signal (e.g., a sequence of video frames) and the circuit 510 produces a NTSC signal for reception on channel 3 of the user's television.

The NID 108 may operate as a gateway to another network such that the NID translates the deconstructed video into

another form that can be distributed on a second network. This is particularly useful for a gateway that couples a wired network to a wireless network, where the wireless network has a narrower bandwidth than the wired network. As  
5 such, users of the wired network may access any lattice node while users of the wireless network may access only low quality nodes.

Alternatively, in another embodiment of the invention, the use may request (order) various grades of video content.

10 As such, a service provider may charge various rates that are commensurate with the quality of video that is ordered.

Another alternative embodiment of the invention uses an eye tracking device that selects a region of a video display that is of most interest, i.e., the component being viewed,  
15 and the user device requests that an augmented bitstream(s) be supplied to enhance that particular region of the imagery, i.e., higher resolution can be applied to that particular portion. In lieu of an eye tracking device that requests selective enhancement in real time, the system may  
20 store an identifier of regions of most interest to a particular viewer, then, when those regions are subsequently shown again, the enhancements are applied to those regions of interest.

The video reconstruction routine 512 of FIG. 6 begins  
25 at step 602 and proceeds to step 604. At step 604, the NID 108 receives the deconstructed bitstreams from the network. At step 606, the routine 600 identifies the user device lattice point. Generally, this lattice point is provided from a lookup table such that by the model number or type of  
30 user device, the NID can identify a lattice point that is commensurate with the capabilities of the user device. The lookup table is generally populated by users registering their devices with a content provider that operates the system of the present invention. The selected lattice point  
35 defines the characteristics for the output video (and audio) that must be generated by the NID. The lattice point identifies the intersection of all the dimensions necessary to produce an appropriately formatted signal, e.g., the



frame rate, the color depth, the resolution, and the like. In addition, the NID may select an available enhancement, i.e., an extracted component, to be used to augment a particular property of the video sequence.

5       At step 608, the streams that correspond to the lattice point (and any augmenting bitstreams) are selected as a subset of all of the bitstreams that are received by the NID. If the bitstreams are identified by different program identifiers (PIDS) in an MPEG-2 or MPEG-7 transport stream,  
10   then the selection process involves identifying the PIDS of the bitstreams that correspond to the selected lattice node. In other transport protocols, the packets of a particular bitstream may be identified by a unique header code. In either instance, the NID will then select only those  
15   bitstreams having the proper information and ignore all others. The video information is cumulative for orthogonal dimensions and components. As such, to create video of selected characteristics, the bitstreams are decoded and the resultant frames from each bitstream are added to one  
20   another.

      At step 610, the information from the selected bitstreams is combined to produce a video sequence that complies with the lattice point characteristics. At step 612, the routine outputs a video sequence that is  
25   commensurate with the lattice point that was identified to match the user device. The routine ends at step 614.

      FIG. 7 depicts a block diagram of another embodiment of the invention comprising a video source 702, a deconstruction processor 704, a first network 706, a second  
30   network 708, a plurality of NIDs 710A, 710B, 710C and 710D and a plurality of network appliances 712A, 712B, 712C, and 712D. The network may also contain one or more intermediate NIDs 716 that perform intermediate level processing of the streams.

35       The video source 702 supplies a sequence of video frames to the deconstruction processor 704. The processor 704 deconstructs the video as described above to produce a plurality of bitstreams. The bitstreams are coupled to the

first network 706. NIDs 710A and 710C are located at the edge of network 706 to extract content from the network 706. These NIDs 710A and 710C extract bitstreams that represent the highest quality that is required by any network

5 appliance that is coupled to the NID 710A or 710C or any sub-NIDs. NIDs 710A and 710C form transition nodes between the two networks 706 and 708.

Sub-NIDs 710B and 710D receive bitstreams from NIDs 710A and 710C. Network appliance 712D receives bitstreams  
10 directly from NID 710C while network appliance 712C receives bitstreams from sub-NID 710D. Sub-NID 710B forms an edge interface to second network 708 comprising network appliances 712A and 712B as well as other NIDs. In this manner, NID 710A extracts bitstreams representing video  
15 having a quality that is sufficient for the network appliances in second network 708. NID 710B sends bitstreams into the network 708 on path 714 at a quality sufficient for the downstream network appliances. As such, bandwidth is conserved at each level.

20 NID 716 is an intermediate node within a network that performs either video deconstruction or reconstruction or some combination thereof. For example, the video source may couple directly to a broadband network and have an intermediate node within the network deconstruct the video  
25 rather than have the deconstruction on the edge of the network. Within the network, one or more other intermediate nodes may further deconstruct one or more deconstructed bitstreams or may reconstruct the video for deconstruction at another node. Within the network any number of  
30 intermediate nodes may perform various combinations of deconstruction and reconstruction of the various bitstreams.

In another embodiment of the invention, the NID may form a "headend" for a content delivery network such as cable television. As such, multiple users may be  
35 transmitted the same programs in the same format broadcast to them via a cable network. Thus, a single output from NID 108 may be coupled to a plurality of user devices.

The present invention, as described above, produces from a single video sequence from a plurality of bitstreams that are formed in a hierarchical structure such that subsets of the bitstreams may be combined to produce a video  
5 sequence that is useful to a user device. As such, the video sequence can be matched to the capabilities of the video processor of the user device.

The invention has been described, by way of illustration, in various embodiments in which the selection  
10 of bitstreams is based at least partly on the capabilities of user display devices. However, as will be clear to practitioners of the art in light of the teachings herein, other embodiments are also possible and suggested, such as embodiments and applications in which selection of

15 bitstreams is based upon a user's desire for image quality, perhaps differentiated across various aspects of an image or images (e.g., perhaps faces or other particular portions of images might be sent at higher quality if users so desired, etc.).

20 Although various embodiments which incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

What is claimed is:

1. A method of deconstructing video comprising:
  - 5 selecting a plurality of dimensions, where each dimension represents a characteristic of a video image sequence; and
  - encoding each selected dimension to form one or more bitstreams.
- 10 2. The method of claim 1 wherein said encoding step comprises:
  - forming a base bitstream representing a first video image sequence having a first set of characteristics; and
  - 15 forming at least one additional bitstream, where each bitstream represents a different dimension and when said first bitstream and said at least one additional bitstream are combined to form a combined bitstream, the combined bitstream represents a reconstructed video image sequence
  - 20 having different characteristics than said first video image.
3. The method of claim 1 wherein said one or more dimensions comprise specific image regions, frame rate,
  - 25 resolution, and color depth.
4. The method of claim 1 wherein the dimensions are arranged in a partial order, where each point in the partial order represents a valid combination of dimensions for
  - 30 encoding the video image sequence.
5. The method of claim 1 wherein said video image sequence is deconstructed into components prior to forming said at least one additional bitstream, where each component is
  - 35 encoded as at least one additional bitstream.
6. The method of claim 1 wherein each of said dimensions is orthogonal.

7. The method of claim 1 wherein said method is performed at the edge of a network.

5 8. The method of claim 1 wherein said method is performed at an intermediate node within a network.

9. The method of claim 8 wherein an intermediate node performs one or more functions selected from reconstruction,  
10 deconstruction, or a combination of deconstruction and reconstruction.

10. The method of claim 1 wherein said selecting step further comprises:

15 separating the video image sequence into a plurality of components; and

selecting a plurality of dimensions to encode each of components in the plurality of components, where each dimension represents a characteristic of a video image  
20 sequence.

11. The method of claim 10 wherein, after encoding, each of said components are represented by a base bitstream and at least one additional bitstream.

25

12. The method of claim 10 wherein said dimensions are orthogonal.

13. The method of claim 10 wherein said selecting step is  
30 performed at the edge of a network.

14. The method of claim 1 wherein said base bitstream represents a video sequence having minimal quality.

35 15. The method of claim 14 wherein said at least one additional bitstream, when combined with said base bitstream, represents a video sequence having a quality that is higher than said base bitstream.

16. A method of distributing deconstructed video through a network comprising a plurality of nodes, the deconstructed video comprising a base bitstream and a plurality of additional bitstreams that, when taken together, represent a video sequence, the method comprising:

selecting within a node said base bitstream and at least one of said additional bitstreams, wherein said selection is performed in response to a capability of a user device that is coupled to said node;

combining said base bitstream and said at least one additional bitstream to form a combined bitstream; and propagating said combined bitstream to the user device.

17. The method of claim 16 wherein said selecting step is performed in an intermediate node within the network and said combining step is performed in an edge node.

18. The method of claim 16 wherein said selecting step is performed at the edge of a network.

19. The method of claim 16 wherein the manner of distribution of said deconstructed video through the network is selected from the following group: broadcast, pointcast, multicast.

20. The method of claim 16 wherein said at least one additional bitstream represents a dimension of said video sequence.

21. The method of claim 16 wherein said base bitstream represents a video sequence having minimal quality.

22. The method of claim 21 wherein said at least one additional bitstream, when combined with said base bitstream, represents a video sequence having a quality that is higher than said base bitstream.

23. The method of claim 16, wherein the network comprises at least one transition node, where each transition node performs a method comprising:

selecting said base bitstream and at least one of said  
5 additional bitstreams for further propagation through a network that is coupled to said at least one transition node.

24. The method of claim 23 wherein said further propagation  
10 is through a second network comprising nodes that perform a method comprising:

selecting said base bitstream and at least one of said  
additional bitstreams, wherein said selection is performed  
in response to a capability of a user device that is coupled  
15 to said node in said second network;

combining said base bitstream and said at least one  
additional bitstream to form a combined bitstream; and  
propagating said combined bitstream to the user device.

25. Apparatus for producing deconstructed video comprising:  
a video component extractor for extracting at least one  
second image sequence from a first image sequence, where  
said at least one second image sequence represents a  
component of said first video image sequence;

25 an encoding dimension selector for selecting a number  
of dimensions to use to encode said at least one second  
image sequence; and

a dimension-based encoder, coupled to said encoding  
dimension selector, for encoding the at least one second  
30 video image sequence into a plurality of bitstreams.

26. The apparatus of claim 25 wherein the dimensions are  
orthogonal.

35 27. The apparatus of claim 25 wherein the components  
comprise foreground, background, and moving objects.

28. The apparatus of claim 25 wherein the dimensions comprise resolution, frame rate, and color.

29. A system for generating and distributing deconstructed  
5 video comprising:

a deconstructed video source for producing a plurality of bitstreams that represent a video sequence;

a communications network, coupled to said deconstructed  
video source, for propagating said plurality of bitstreams;  
10 and

a plurality of network interface devices (NIDs),  
coupled to said network, for extracting a subset of the  
plurality of bitstreams and propagating said subset of  
bitstreams to a user device.  
15

30. The system of claim 29 further comprising transition  
nodes, coupled to said network, for extracting a subset of  
said plurality of bitstreams from said network and coupling  
the subset of bitstreams to a second network.  
20

31. The system of claim 30 further comprising NIDs coupled  
to said second network for extracting a further subset of  
the subset of bitstreams and coupling the further subset of  
bitstreams to a user device.  
25

32. A computer readable medium containing software that,  
when executed by one or more general purpose computers  
operating as network nodes, causes the computer or computers  
to perform a method comprising:

30 selecting a plurality of dimensions, where each  
dimension represents a characteristic of a video image  
sequence; and

encoding each selected dimensions to form one or more  
bitstreams.  
35

33. The method of claim 32 wherein said encoding step  
comprises:



forming a base bitstream representing a first video image sequence having a first set of characteristics; and forming at least one additional bitstream, where each bitstream represents a different dimension and when said first bitstream and said at least one additional bitstream are combined to form a combined bitstream, the combined bitstream represents a reconstructed video image sequence having different characteristics than said first video image.

10

34. The method of claim 32 wherein said one or more dimensions comprise specific image regions, frame rate, resolution, and color depth.

15

35. The method of claim 32 wherein the dimensions are arranged in a partial order, where each point in the partial order represents a valid combination of dimensions for encoding the video image sequence.

20

36. The method of claim 32 wherein said video image sequence is deconstructed into components prior to forming said at least one additional bitstream, where each component is encoded as at least one additional bitstream.

25

37. The method of claim 32 wherein each of said dimensions is orthogonal.

38. The method of claim 32 wherein said method is performed at the edge of a network.

30

39. The method of claim 32 wherein said selecting step further comprises:

separating the video image sequence into a plurality of components, where each component has a common

35

characteristic; and

selecting a plurality of dimensions to encode each of components in the plurality of components, where each

dimension represents a characteristic of a video image sequence.

40. The method of claim 39 wherein, after encoding, each of  
5 said components is represented by a base bitstream and at least one additional bitstream.

41. The method of claim 32 wherein said dimensions are  
10 orthogonal.

42. The method of claim 32 wherein said selecting step is  
performed at the edge of a network.

43. The method of claim 32 wherein said at least one  
15 additional bitstream represents a dimension of said video sequence.

44. The method of claim 32 wherein said base bitstream  
20 represents a video sequence having minimal quality.

45. The method of claim 44 wherein said at least one  
additional bitstream, when combined with said base  
bitstream, represents a video sequence having a quality that  
is higher than said base bitstream.

25

Abstract of the Disclosure

5        A method and apparatus for deconstructing video into a  
hierarchical structure, distributing the deconstructed video  
and reconstructing the deconstructed video to form a video  
signal having characteristics that match the capabilities of  
a user device. The video stream may be deconstructed using  
10 a single dimension deconstruction or a multidimensional  
deconstruction.

2025-11-11 14:00:00

009077" 11020260

100


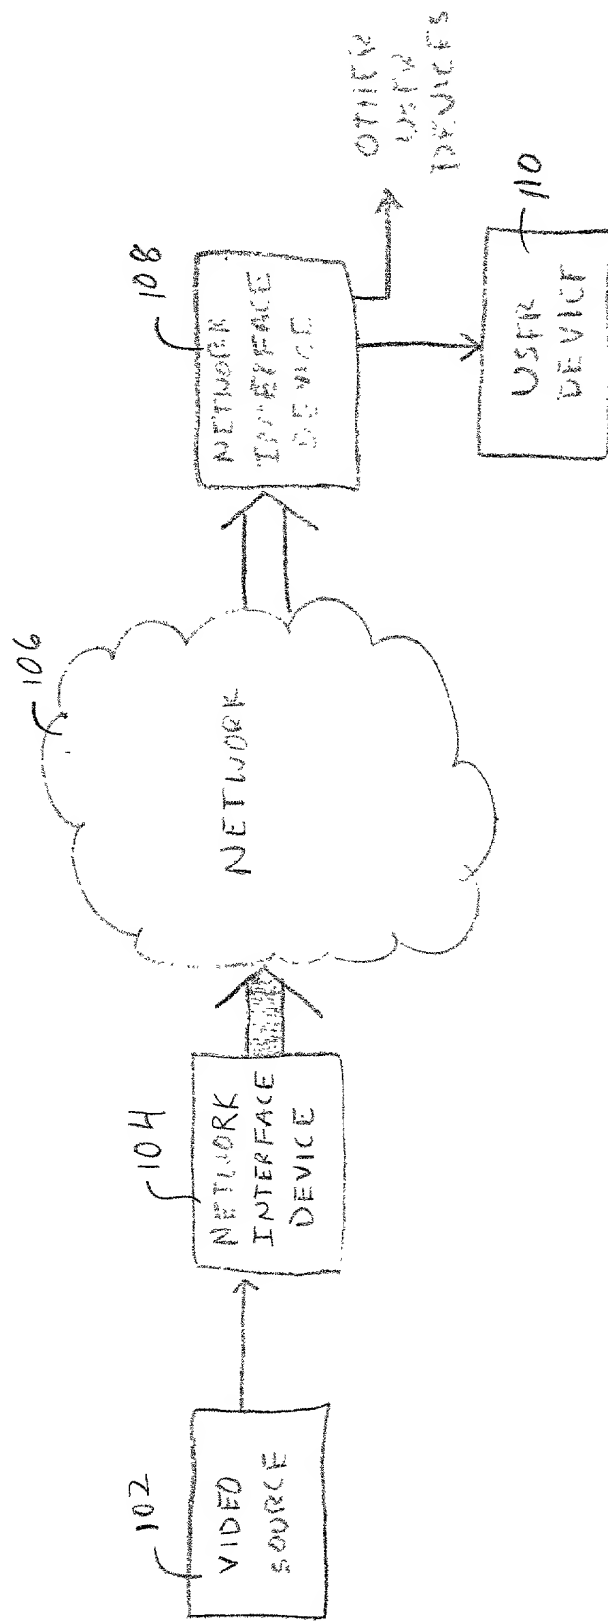


FIG. 1

00507F"11020260

104

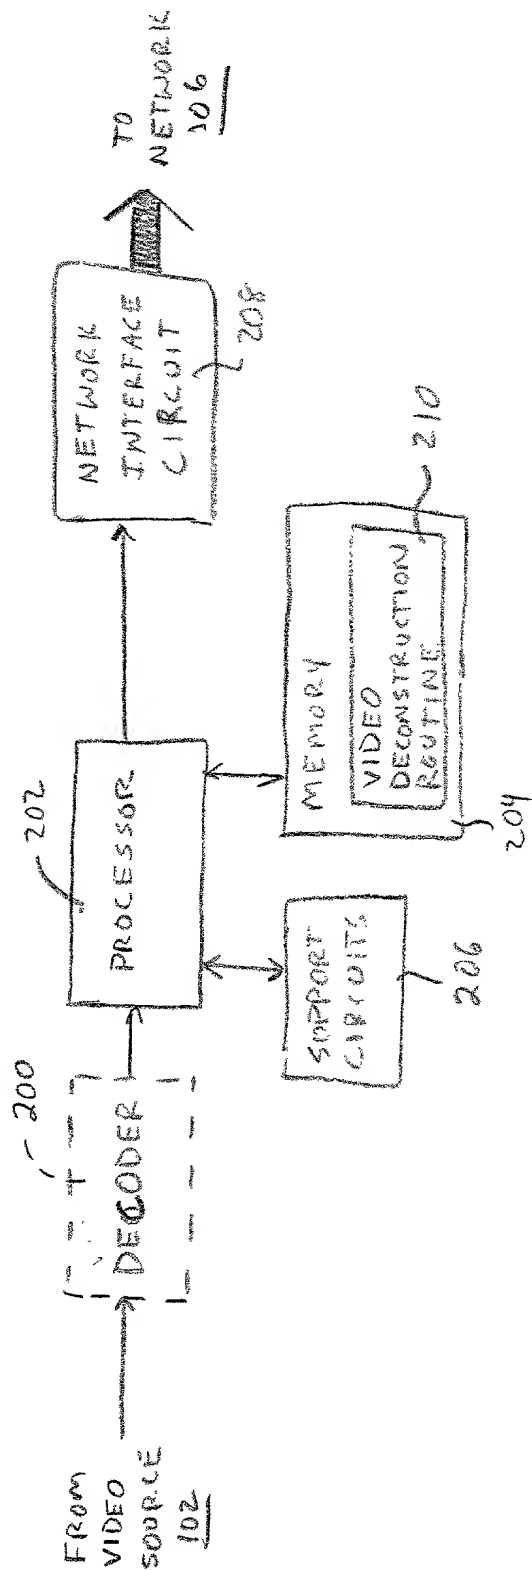

F16, 2

009071-111020200

FIG. 3

VIDEO  
DECONSTRUCTION  
ROUTINE  
210


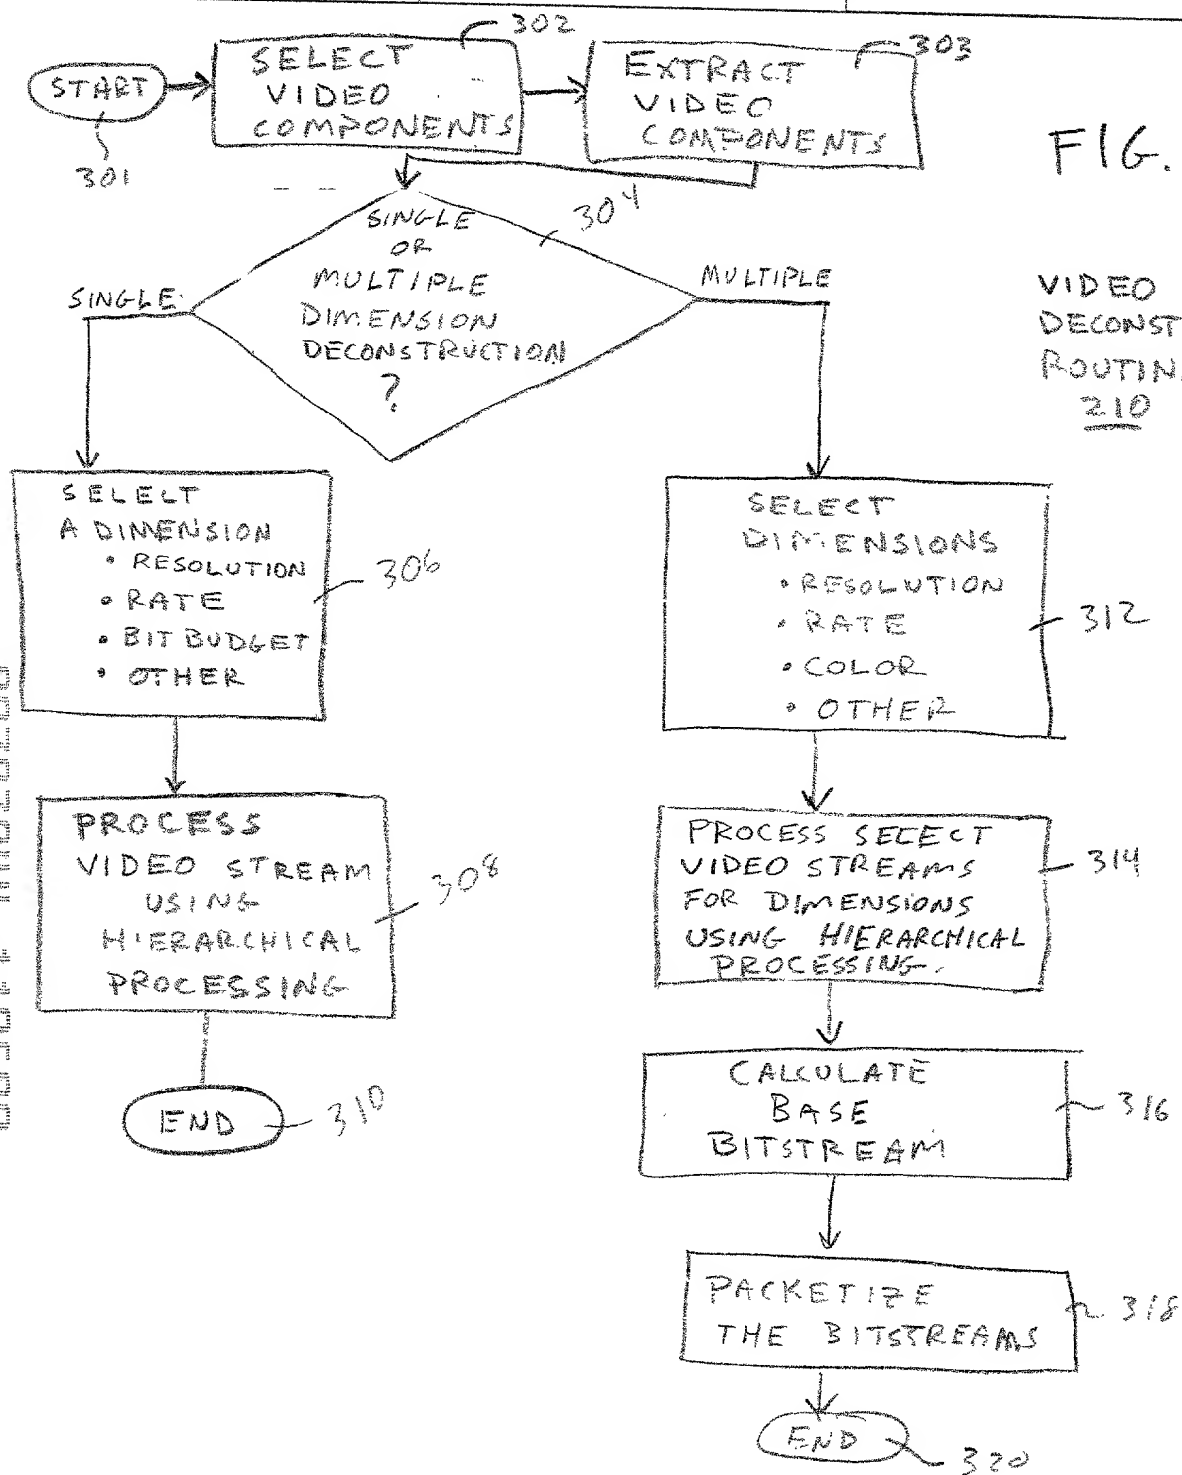


FIG. 4

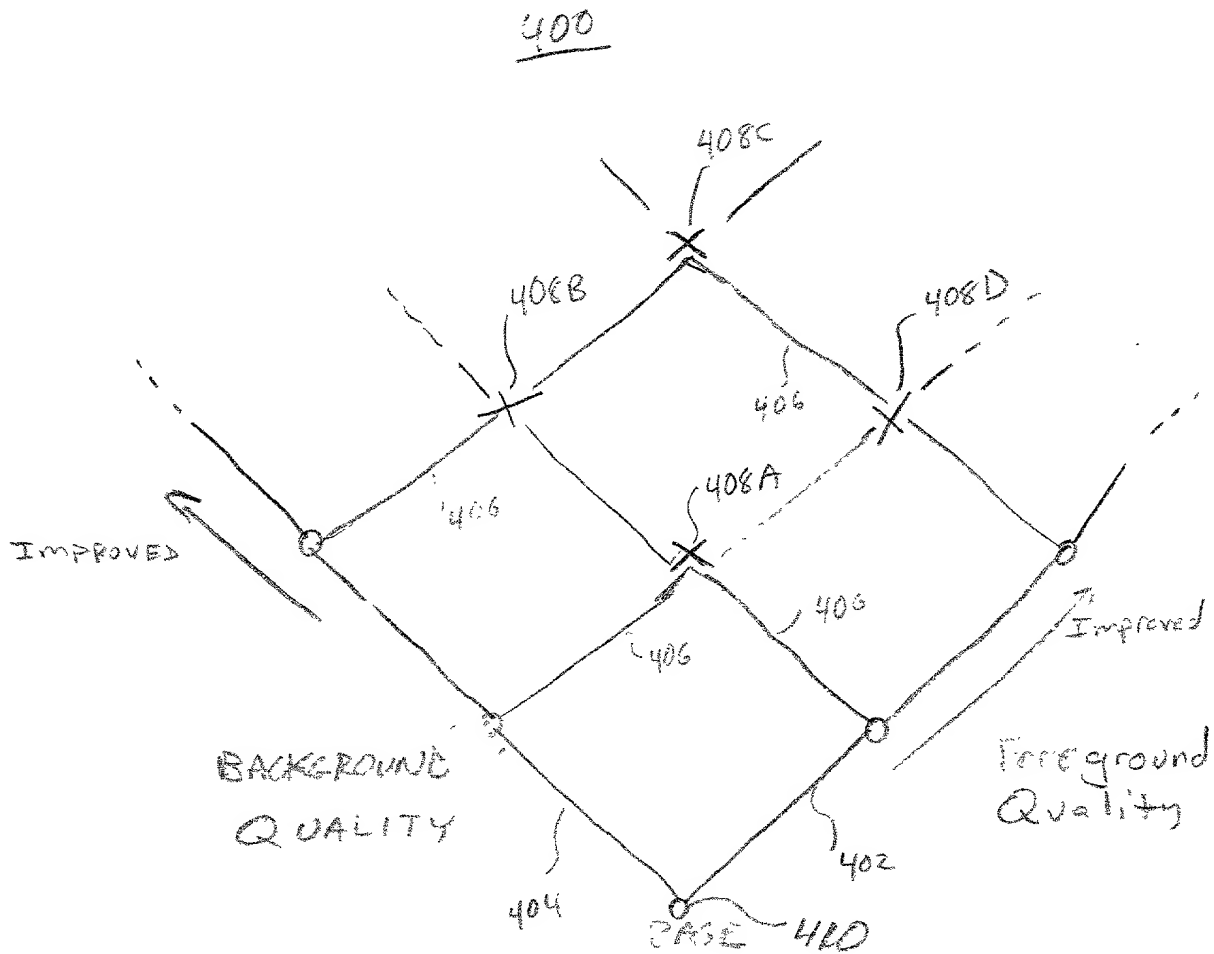

009077-111020200

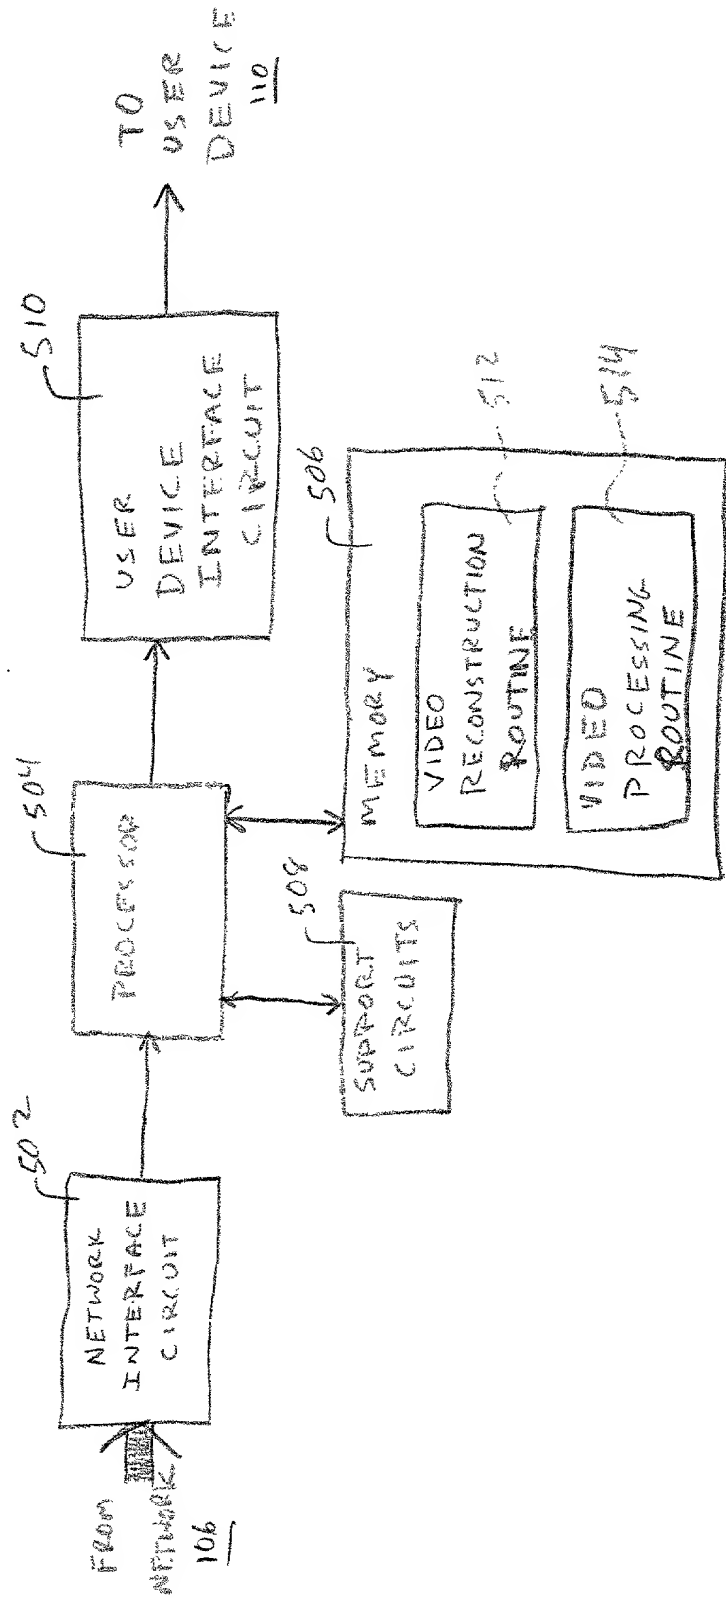


FIG. 5



FIG. 6

VIDEO  
RECONSTRUCTION  
ROUTINE  
512


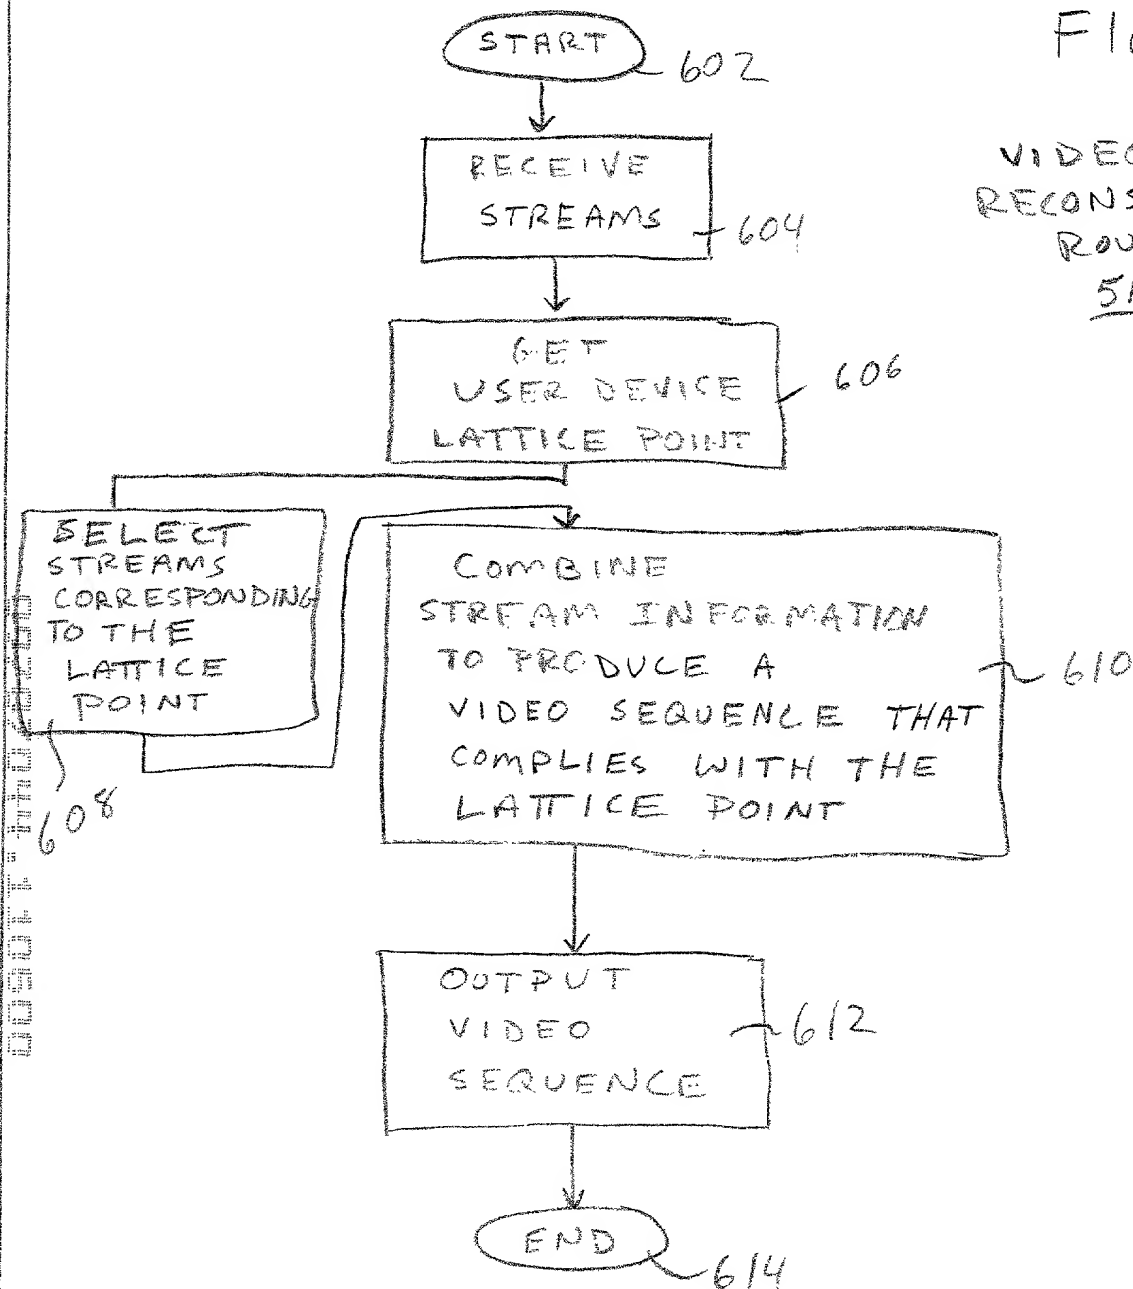


FIG. 7

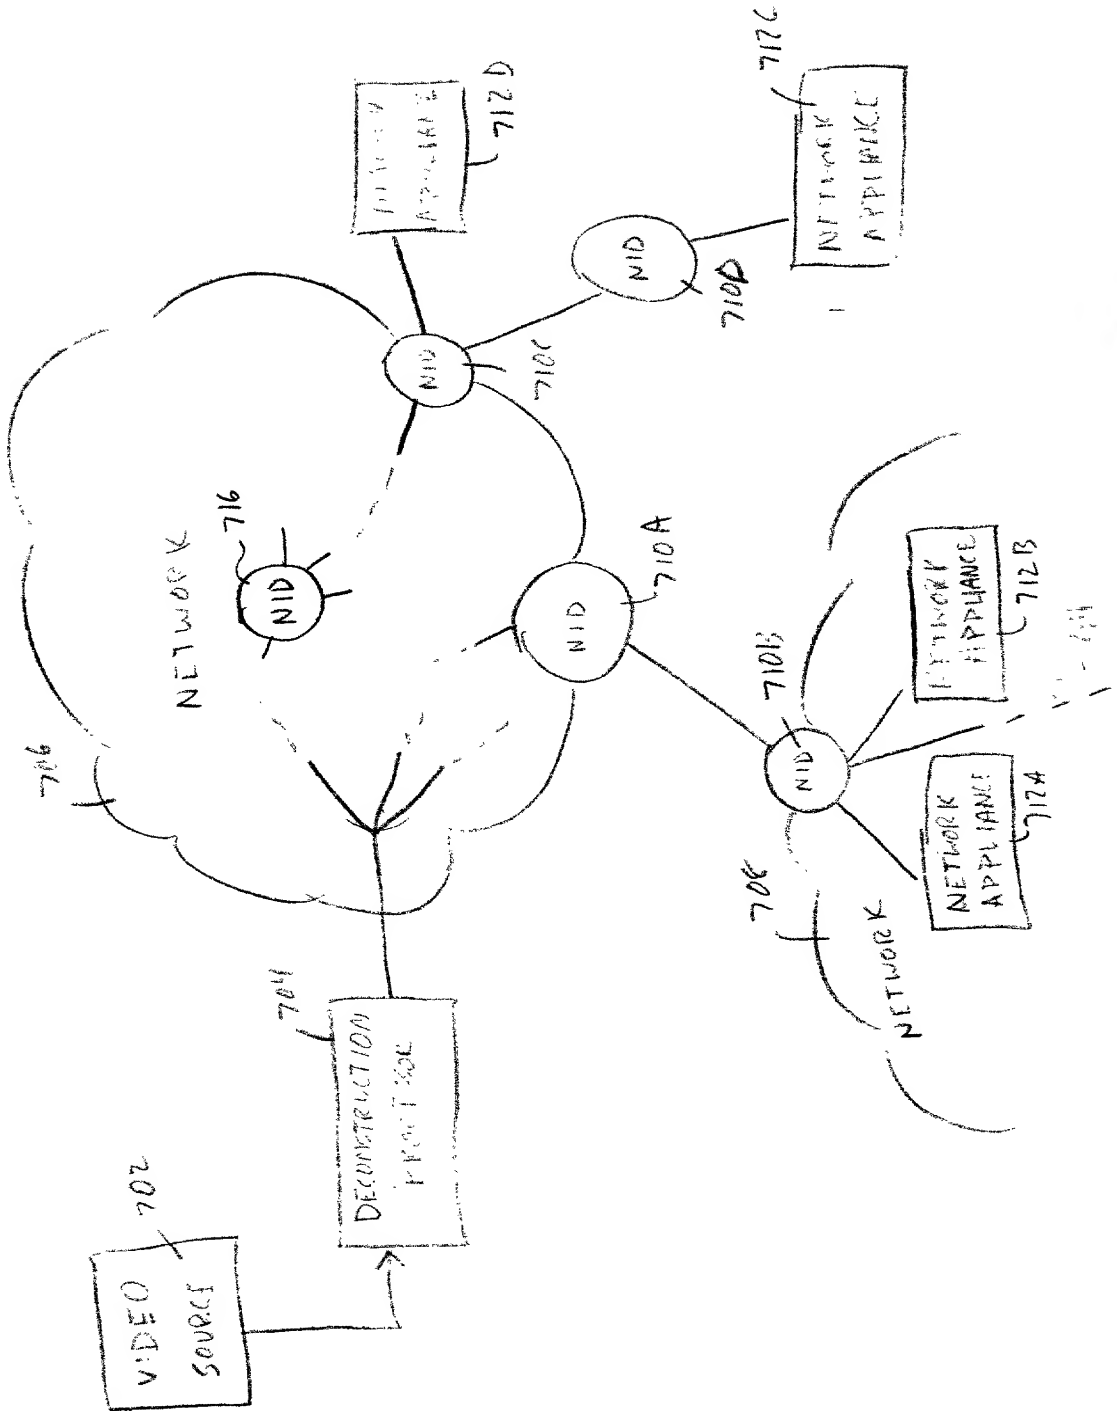

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

This declaration is of the following type:

- ☒ original  
☐ divisional  
☐ continuation  
☐ continuation-in-part

**INVENTORSHIP IDENTIFICATION**

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TITLE OF INVENTION****METHOD AND APPARATUS FOR GENERATING, DISTRIBUTING AND RECONSTRUCTING DECONSTRUCTED VIDEO****SPECIFICATION IDENTIFICATION**

The specification of which:

- ☒ is attached hereto;  
☐ was filed on \_\_\_\_\_, under Serial No. \_\_\_\_\_, executed on even date herewith; or  
☐ Express Mail No. \_\_\_\_\_ (Serial No. not yet known) and was amended on \_\_\_\_\_ (if applicable)  
☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as amended under PCT Article 19 on \_\_\_\_\_.

**ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56, and which is material to the examination of this application; namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and

- ☐ In compliance with this duty there is attached an Information Disclosure Statement in accordance with 37 CFR §1.98.

**PRIORITY CLAIM (35 U.S.C. § 119)**

I hereby claim foreign priority benefits under Title 35, United States Code, 119, of any provisional or foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below, and have also identified below any provisional or foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least

one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

☒ No such applications have been filed.

☐ Such applications have been filed as follows:

**A. Prior foreign/PCT application(s) filed within 12 mos. (6 mos. for design) prior to this application, and any priority claims under 35 U.S.C. § 119**

<u>Country/PCT</u>	<u>Application No</u>	<u>Date Filed</u>	<u>Priority Claimed</u>
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

**B. All foreign application(s), if any, filed more than 12 mos. (6 mos for design) prior to this U.S. application**

Country:

Application No:

Filing date:

**C. U.S. Provisional Application filed within 12 months prior to this application**

<u>Serial No.</u>	<u>Filing Date</u>

**PRIORITY CLAIM (35 U.S.C. §120)**

I hereby claim the benefit under Title 35, United States Code, Section 120, of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information that is material to the examination of this application (namely, information where there is substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

☐ No such applications have been filed

☐ Such application have been filed, as follows:

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status</u>	
		<u>Patented</u>	<u>Pending</u>
			<u>Abandoned</u>

**POWER OF ATTORNEY**

I hereby appoint the following attorneys and/or agents of Thomason, Moser & Patterson LLP to prosecute this application and transact all business in the Patent and Trademark Office having a Customer Number 26291 connected therewith:



26291

PATENT TRADEMARK OFFICE

**Send correspondence to:**

Thomason, Moser and Patterson, LLP  
595 Shrewsbury Avenue  
Suite 100  
Shrewsbury, New Jersey 07702


**Direct telephone calls to:**

Raymond R. Moser Jr.  
(732) 530-9404

**DECLARATION**

*I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and, further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Sec. 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.*

Full name of **sole or first** inventor: Patrick D. Lincoln

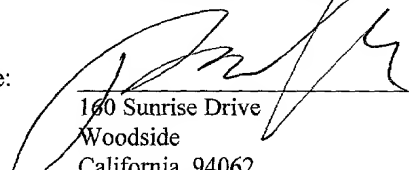Inventor's signature: 

Date: 3 Nov 2000

Residence:


160 Sunrise Drive  
Woodside  
California, 94062

Post Office Address:

same as above

Country of Citizenship: U.S.A.

Full name of **second** inventor: David W.J. Stringer-Calvert

Inventor's signature: 

Date: 3 Nov 2000

Residence:


655 S. Fair Oaks Ave. #H-111  
Sunnyvale  
California 94086

Post Office Address:

same as above

Country of Citizenship: UK

Full name of **third** inventor: Steven M. Dawson

Inventor's signature: 

Date: 3 November 2000

Residence:

423 Waverly Street  
Menlo Park  
California 94025

Post Office Address:

same as above

Country of Citizenship: U.S.A.